


### 1. STANDARD INSTALLATION


Top Mounted. Standard Collar

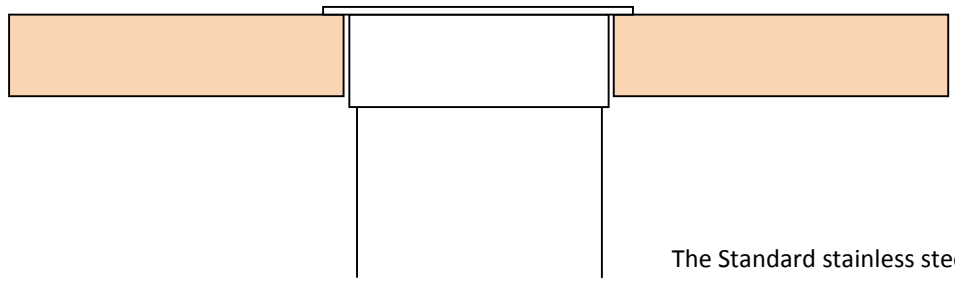

The Standard stainless steel top supplied can be changed for matching material to work top if required in both these instances

### 2. FLUSH MOUNTED INSTALLATION


Flush Mounted into Work Surface. Approx 2mm rebate. Standard Collar

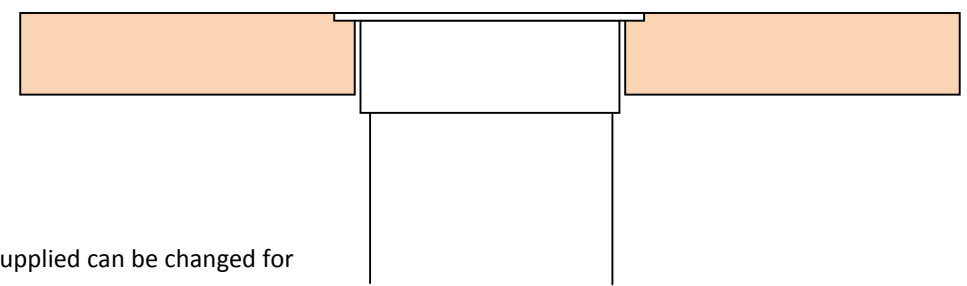

**CUT OUT DIMENSIONS:** POWER BOX **115 x 295mm** KNIFE/SPICE/KEY/CHEF CENTRE/I-DOCK & I-PAD **115 x 425mm** TV BOX **138 x 535mm**

### 3. REBATED INSTALLATION


For Custom Top (12mm max) in 30mm or greater material. Standard Collar.

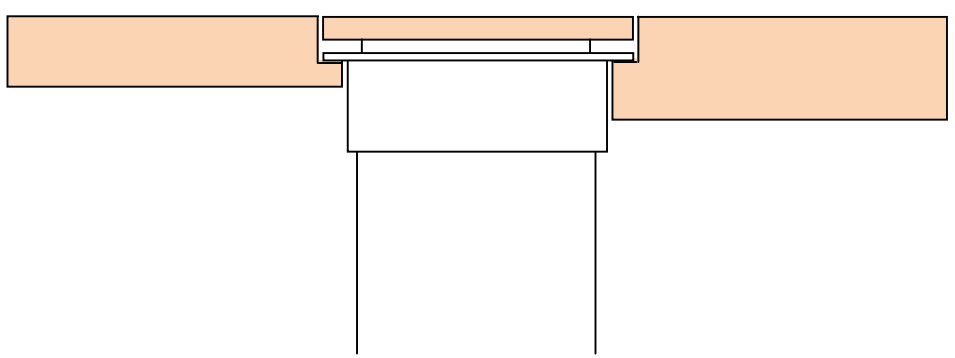

**CUT OUT DIMENSIONS:** AS ABOVE BUT WITH ADDITIONAL 8mm REBATE x 18mm DEEP.  
 NEW TOP SHOULD BE CUT TO MATCH THE REBATED DIMENSION,  
 WITH APPROX 1mm GAP ALL THE WAY ROUND

### 4. UNDERMOUNT INSTALLATION

For Custom Top (12mm thick max) in 20mm Material ONLY

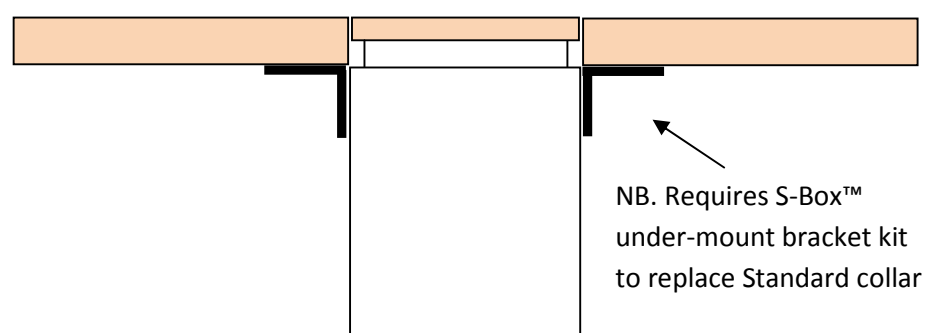

**CUT OUT DIMS:** POWER BOX **103 x 283mm**  
 KNIFE/SPICE/KEY/CHEF+I-BOXES **103 x 413mm**  
 TV **126 x 525mm**